

64615 HLX

Halogen lamps with reflector MR16



Product features

- Xenon instead of krypton as the filler gas (XENOPHOT HLX versions)
- Luminous flux up to 10 % higher with same power consumption (XENOPHOT HLX versions)

Technical data

Electrical data


Nominal voltage	12 V
Nominal wattage	75 W

Light technical data


Focal length	32.0 mm
--------------	---------

Dimensions & weight

Diameter	51.0 mm
Length	42.0 mm

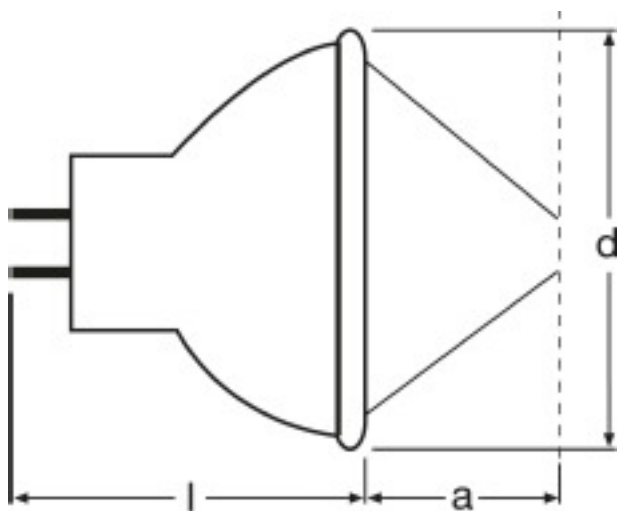

Product line drawing with letters

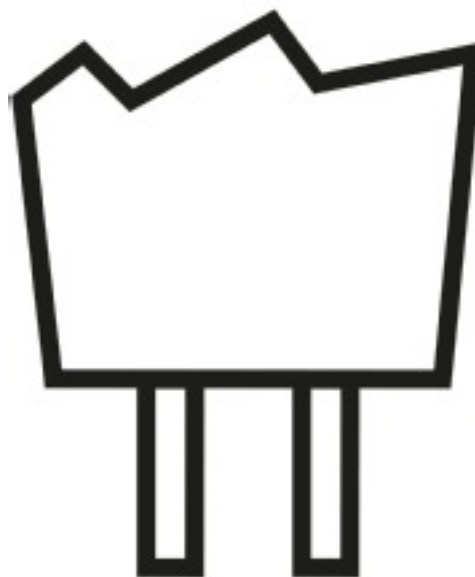

Base

Lifespan

Lifespan	50 h
----------	------

Additional product data

Base (standard designation)	GZ6.35
Coating	Dichroic

Capabilities

Cooling	Forced
Burning position	p90

Country specific categorizations

ANSI code	EFN
LIF	A1/230
Order reference	64615 HLX



Burning position

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300006796	Folding carton box 1	46 mm x 46 mm x 58 mm	36.00 g	0.12 dm ³
4050300665528	Shipping carton box 20	107 mm x 121 mm x 238 mm	796.00 g	3.08 dm ³

References / Links

For further technical information please refer to the following OSRAM brochure:

“Technology and applications, Low-voltage tungsten-halogen lamps”

“Halogen lamps, low and medium voltage for entertainment, technical and medical applications” cross reference list

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.