


2473MFX6

Lamps for printed circuit boards

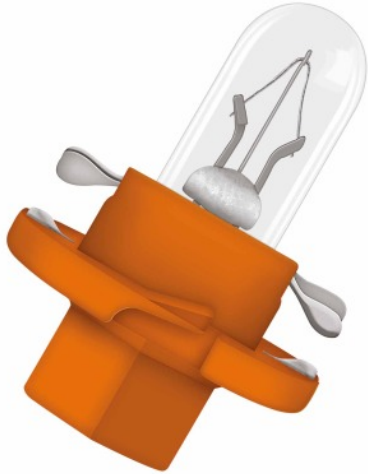

Areas of application

- Instrument and switch lighting

Product benefits

- OEM Quality
- Wide product range
- Reliable quality

Product features

- Original spare parts

Technical data


Electrical data

Power input	1.12 W
Nominal wattage	1.12 W
Nominal voltage	12 V
Power input tolerance	±10 %
Test voltage	14.0 V

Light technical data

Luminous flux	3.6 lm
Luminous flux tolerance	±25 %

Dimensions & weight



Product line drawing

Length	17.5 mm
Diameter	5.0 mm
Product weight	0.74 g

Colors & materials

Base color	Pastel orange
------------	---------------

Lifespan

Lifespan B3	500 h
Lifespan Tc	5000 h

Additional product data

Product datasheet

Base (standard designation)	BX8.4d
------------------------------------	--------

Capabilities

Thickness of PCB	1.25 mm
-------------------------	---------

Certificates & standards

ECE category	-
---------------------	---

Country specific categorizations

Order reference	2473MFX6
------------------------	----------

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321096821	OSRA2473MFX6	-	-	-

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Volume	Gross weight
4008321096821	2473MFX6	Unpacked 1	11 mm x 7 mm x 18 mm	0.00 dm ³	1.00 g
4008321096838	2473MFX6	Folding carton box 10	113 mm x 46 mm x 26 mm	0.14 dm ³	20.33 g
4008321096845	2473MFX6	Shipping carton box 50	140 mm x 55 mm x 129 mm	0.99 dm ³	122.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.